
MORNSUN®

TD341S485H
DFN package isolated RS485 Transceiver

Features

- Ultra-small, ultra-thin, chip scale DFN package
- Compliant with TIA/EIA-485-A standard
- Integrated isolated 3.3V power
- High isolation to 5000VDC
- Bus-Pin ESD protection up to 15kV(HBM)
- Baud rate up to 20Mbps
- >25kV/us CMTI
- Low communication delay
- 1/8 unit load—up to 256 nodes on a bus
- Bus fail-safe
- Bus driver short circuit protection
- Industrial operating ambient temperature range: -40℃ to +105℃
- Meet EN62368 standards
- Moisture Sensitivity Level (MSL) 3

Package

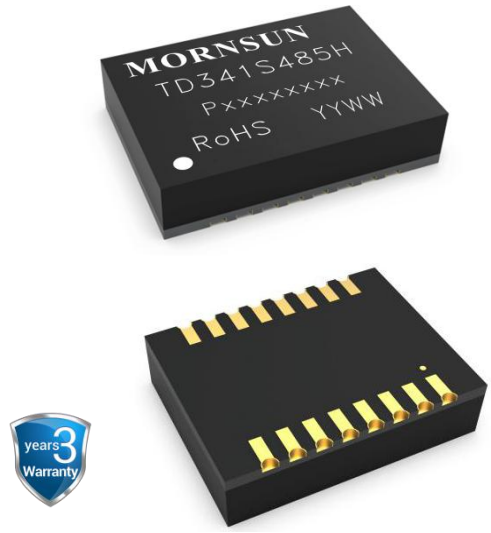

Applications

- Industrial Automation
- Building Automation
- Smart Electricity Meter
- Remote Signal Interaction, Transmission

Functional Description

TD341S485H is a half-duplex enhanced transceiver designed for RS–485 data bus networks, which is fully compliant with TIA/EIA-485-A standard and is suitable for data transmission of up to 20Mbps. Receivers have an exceptionally high input impedance, which places only 1/8 of the standard load on a shared bus and up to 256 transceivers.


The reliability design of A and B pin is emphasized, including driver output over current protection and enhanced ESD design. The ESD protection level of A, B pin can be up to 15kV (Human Body Model).

MORNSUN Guangzhou Science & Technology Co., Ltd. reserves the copyright and right of final interpretation

Contents


1 Home.....1
1.1 Feature and Package.....1
1.2 Applications.....1
1.3 Functional Description.....1
2 Pin Connection and Description.....2
3 IC Related Parameters.....3
3.1 Absolute Maximum Rating.....3
3.2 Recommended Operating Conditions.....3
3.3 Electrical Characteristics.....4
3.4 Transmission Characteristics.....5
3.5 Physical Characteristics.....5
4 Characteristic Curve.....5
4.1 Typical Performance Curve.....5
4.2 Parameter Measurement Information.....5
5 Product working Description.....6
6 Application Circuit.....7
7 Suggestions for Power Supply.....7
8 Order Information.....8
9 Package Information.....8
10 Tape & Reel Information.....9

Pin Connection

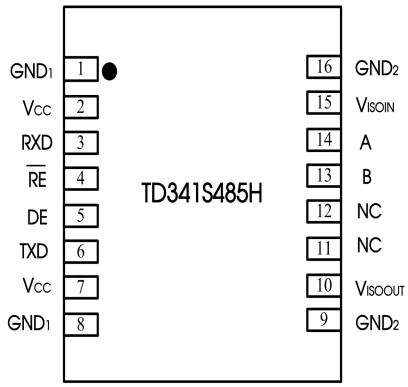

Note: All GND_1 pins are internally connected.
All GND_2 pins are internally connected.

Internal Block

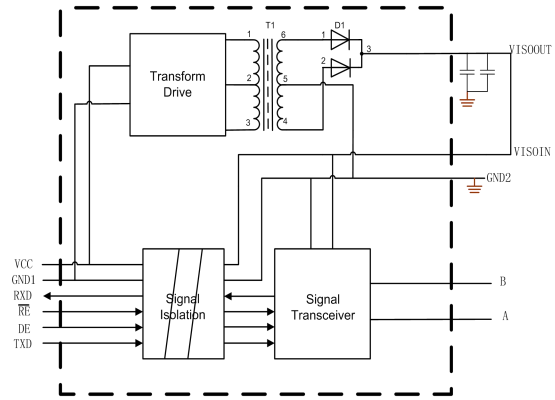

Function Table

Letter	Description
H	High-Level
L	Low-Level
X	Unrelated
Z	High Impedance

Table 1. Driver Function table

TXD	DE	Output	
		A	B
H	H	H	L
L	H	L	H
X	L	Z	Z
Open	H	H	L

Table 2. Receiver Function table

Difference input $V_{ID} = (V_A - V_B)$	$\overline{RE}$	RXD
–0.01 V ≤ V_{ID}	L	H
–0.2 V < V_{ID} < –0.01 V	L	Uncertainty
V_{ID} ≤ –0.2 V	L	L
Open circuit	L	H
Short circuit	L	H

MORNSUN Guangzhou Science & Technology Co., Ltd. reserves the copyright and right of final interpretation

Pin Descriptions

Pin Number	Pin Name	Pin Functions
1	GND_1	Ground(Logic side).
2	V_{CC}	Power supply. By using 0.1uF ceramic capacitance ground(GND_1).
3	RXD	Receiver output pin.
4	$\overline{RE}$	Receiver enable input. When $\overline{RE}$ is low, if (A − B) ≥ −10 mV, then RXD = high. if (A − B) ≤ −200 mV, then RXD = low.
5	DE	Driver enable input. When DE is high, outputs are enabled. When DE is low, outputs are high impedance. Drive DE low and $\overline{RE}$ high to enter shutdown mode.
6	TXD	Driver input pin.
7	Vcc	Power supply. By using 1uF ceramic capacitance ground(GND_1).
8	GND_1	Ground(Logic side).
9	GND_2	Ground (Bus Side).
10	V_{ISOOUT}	Insulation power output. By using 1uF Ceramic capacitance ground(GND_2, pin9). The pin needs to be connected to pin15 in application.
11	NC	No Connect.
12	NC	No Connect.
13	B	RS485 Bus A Line.
14	A	RS485 Bus B Line.
15	V_{ISOIN}	Insulation power input. By using 0.1uF ceramic capacitance ground(GND_2, pin16). The pin needs to be connected to pin10 in application.
16	GND_2	Ground (Bus Side).

Absolute Maximum Ratings

General test conditions: Free-air, normal operating temperature range (Unless otherwise specified).

Parameters	Unit
Supply voltage	-0.3V to +3.5V
A, B Bus voltage	-8V to+13V
Digital Input Voltage (DE, $\overline{RE}$, TXD, RXD)	-0.3V to+3.5V
Operating Temperature Range	−40°C to +105°C
Storage Temperature Range	−50°C to +125°C
Reflow Soldering Temperature	Peak temp. ≤250℃, maximum duration ≤60s at 217℃. Please also refer to IPC/JEDEC J-STD-020D. 3.

Important: Exposure to absolute maximum rated conditions for an extended period may severely affect the device reliability, and stress levels exceeding the “Absolute Maximum Ratings” may result in permanent damage.

Recommended Operating Conditions

Symbol	Recommended Operating Conditions		Min.	Typ.	Max.	Unit
V_{CC}	Supply voltage		3.15	3.3	3.45	V
V_I	Voltage at any bus terminal (differential or common mode)		-7		12	
V_{IH}	High-level input voltage(TXD, DE, $\overline{RE}$)		2		V_{CC}	
V_{IL}	Low-level input voltage(TXD, DE, $\overline{RE}$)		0		0.8	
I_{OS}	Output current	Driver	-60		60	mA
		Receiver	-8		8	
R_{IN}	Differential output load resistance		54	60		Ω
T_A	Operating temperature range		-40		105	℃
-	Signaling rate				20	Mbps

MORNSUN Guangzhou Science & Technology Co., Ltd. reserves the copyright and right of final interpretation

Electrical Characteristics

General test conditions and V_{CC}=3.3V, Ta = 25℃ (unless otherwise specified).

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
Driver						
$\|V_{OD}\|$	Differential driver output	No load	3.5			V
		R_L=54Ω, Figure 6	1.5	2.0		V
		R_L=100Ω, Figure 6	2.0			
ΔV_{OD}	$\Delta\|V_{OD}\|$ for complementary output states	R_L=54Ω, Figure 6			±0.2	V
V_{OC}	Common-Mode output voltage	Figure 5	1		3	V
$\Delta V_{OC(SS)}$	$\Delta\|V_{OC}\|$ for complementary output states	Figure 5	-0.1		0.1	V
I_{OS}	Output short-circuit current	-7V≤V_A or V_B ≤ +12V		±110	±250	mA
R_{TXD}	Internal TXD Pull up Resistor			5.1		kΩ
R_{DE}	Internal DE Pull down Resistor			5.1		kΩ
Receiver						
$V_{IT(+)}$	Positive differential input threshold voltage	−7 V ≤ V_A or V_B ≤ +12 V			–10	mV
$V_{IT(–)}$	Negative differential input threshold voltage	−7 V ≤ V_A or V_B ≤ +12 V	–200			mV
V_{hys}	Hysteresis voltage (V_{IT+} – $V_{IT–}$)	−7 V ≤ V_A or V_B ≤ +12 V		20		mV
R_{ID}	Differential input resistance(A, B)	−7 V ≤ V_A or V_B ≤ +12 V	96			kΩ
I_I	Input current (A, B)	DE=0, $\overline{RE}$ =0, V_{CC}=0 or 3.3V; V_{OUT} =12V		190	250	uA
		DE=0, $\overline{RE}$ =0, V_{CC}=0 or 3.3V; V_{OUT} = -7V	-200	-110		uA
V_{OH}	RXD output high voltage	I_{OUT} = 20 μA, V_A − V_B = 0.2 V	V_{CC} − 0.1			V
		I_{OUT} = 4 mA, V_A − V_B = 0.2 V	V_{CC} − 0.4	V_{CC} − 0.2		V
V_{OL}	RXD output low voltage	I_{OUT} = −20 μA, V_A − V_B = −0.2 V			0.1	V
		I_{OUT} = −4 mA, V_A − V_B = −0.2 V			0.4	V
Power supply and safeguard characteristic						
I_{CC}	Supply current	DE=$\overline{RE}$ =0V		15	30	mA
I_{CC}	Working current	Between A, B 100Ω load		90	105	mA
		Between A, B 54Ω load, 1Mbps		105	120	mA
		Between A, B 54Ω load, 20Mbps			130	mA
ESD	HBM	A, B to GND			±15	kV
		Other pin			±2	kV
EFT	IEC61000-4-4	A, B and GND			±2	kV
SURGE	IEC61000-4-5	A, B and GND(Common Mode)			±2	kV
VI-O	Insulate voltage				5000	VDC
	Insulate impedance		1			GΩ
	Insulate capacitance			3		pF
CMTI	Common mode transient immunity	TXD = V_{CC} or 0 V, V_{CM} = 1 kV, transient magnitude = 800 V	25			kV/us

MORNSUN Guangzhou Science & Technology Co., Ltd. reserves the copyright and right of final interpretation

Transmission Characteristics

General test conditions and V_{CC}=3.3V, Ta = 25℃ (unless otherwise specified).

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
-	Maximum data rate	Duty 40% ~ 60%			20	Mbps
Test conditions: 25℃, transmission rate = 1Mbps						
T_{PHL}, T_{PLH}	Driver propagation delay	R_L = 54Ω, C_L = 50pF, Figure 7		100	200	ns
$\|T_{PHL}-T_{PLH}\|$	Driver skew ($\|T_{PHL}-T_{PLH}\|$)			30	100	ns
T_R, T_F	Driver rise/fall time			50	100	ns
T_{PHL}, T_{PLH}	Receiver propagation delay	C_L = 15pF Figure 8		50	150	ns
$\|T_{PHL}-T_{PLH}\|$	Receiver skew ($\|T_{PLH}-T_{PHL}\|$)			15	50	ns
T_R, T_F	Receiver rise/fall time	C_L = 15pF Figure 8		15		ns
Test conditions: 25℃, transmission rate = 20Mbps						
T_{PHL},T_{PLH}	Driver propagation delay	R_L = 54Ω, C_L = 50pF, Figure 7			140	ns
$\|T_{PHL}-T_{PLH}\|$	Driver skew ($\|T_{PHL}-T_{PLH}\|$)				15	ns
T_R,T_F	Driver rise/fall time				50	ns
T_{PHL},T_{PLH}	Receiver propagation delay	C_L = 15pF Figure 8		60	150	ns
$\|T_{PHL}-T_{PLH}\|$	Receiver skew ($\|T_{PLH}-T_{PHL}\|$)				20	ns
T_R,T_F	Receiver rise/fall time	C_L = 15pF Figure 8		25		ns

Physical Characteristics

Parameters	Value	Unit
Weight	0.9(Typ.)	g

Typical Performance Curves

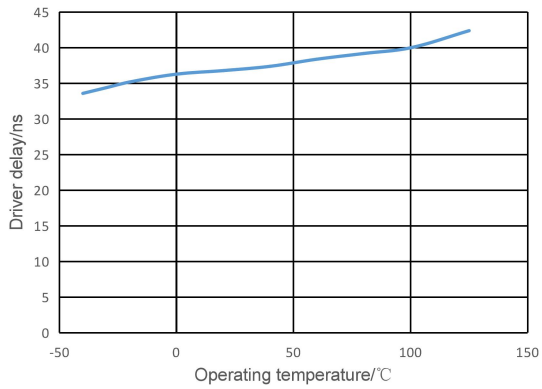


Figure 1. Driver delay vs. Operating Temperature

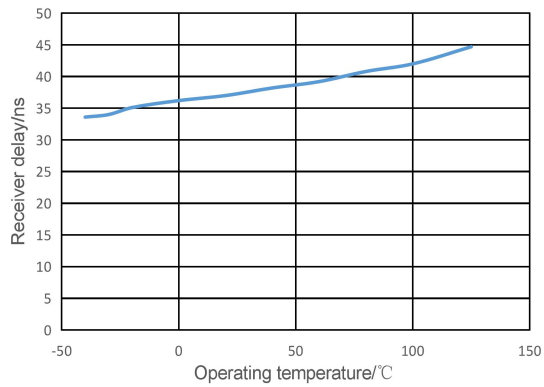


Figure 2. Receiver delay vs. Operating Temperature

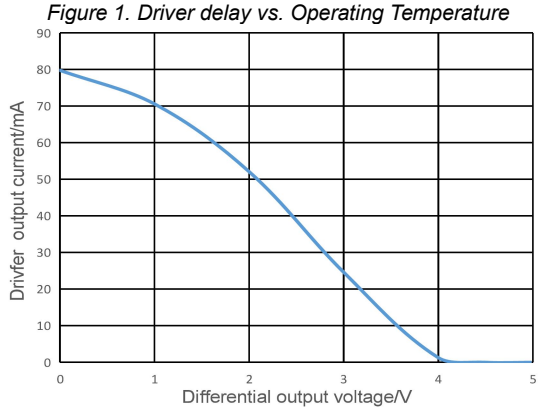


Figure 3. Driver output current vs. Differential output voltage

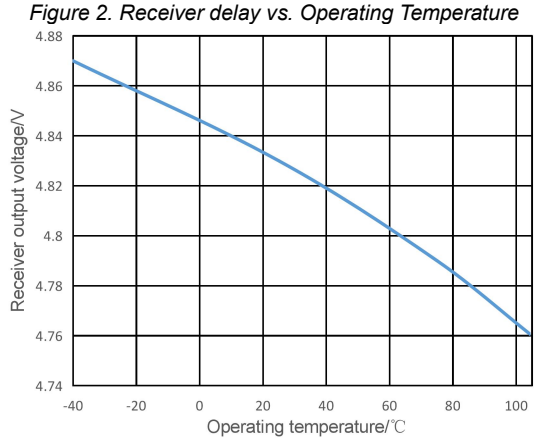


Figure 4. Receiver output high voltage vs. Operating Temperature

MORNSUN Guangzhou Science & Technology Co., Ltd. reserves the copyright and right of final interpretation

Test Circuits

Note:Testing the condition burden capacitance including test to stretch forward and testing fixture parasitic capacitance. Testing semaphore upswing and droop to follow < 6ns. frequency 100kHz. duty50%. resistance Z_O = 54Ω.

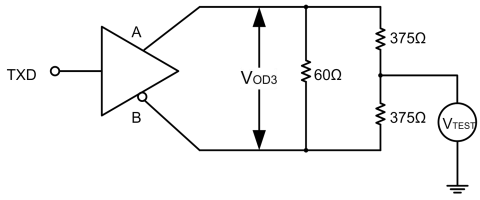


Figure 5. Driver test circuit, VOD with differential mode loading



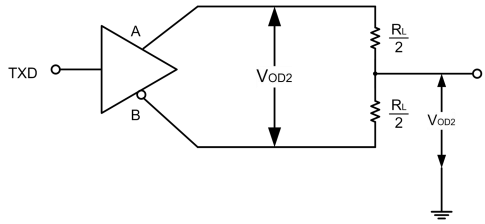



Figure 6. Driver test circuit

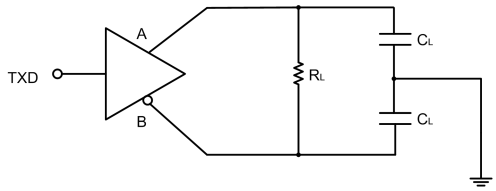

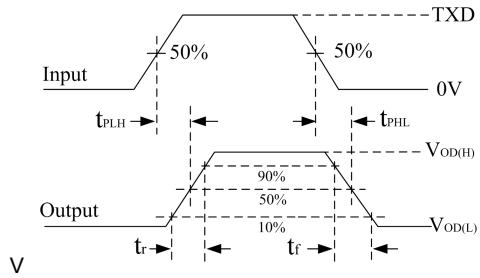

V

Figure 7. Drive propagation delay test circuit and wave forms

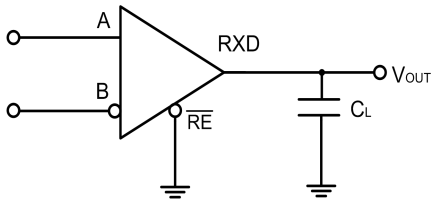

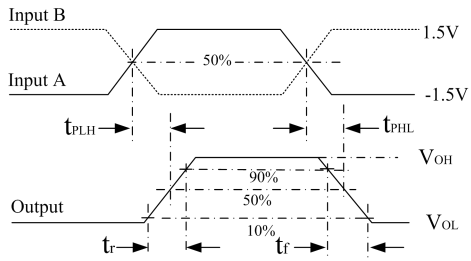


Figure 8. Receiver propagation delay test circuit and wave forms

Detailed Description

TD341S485H is a semi-duplex enhanced RS485 isolated transceiver with isolated power supply. In addition to an isolated power supply, each transceiver contains a drive and a receiver. The transceiver has a standby bus failure protection function to ensure that the receiver output is high when the receiver input is open, short, or when the bus is idle. TD341S485H adopts 3.3VDC single power supply. The whole machine can monitor the overall working state of the module and limit the output high current, so as to prevent the bus overload or short circuit from causing non-recoverable damage to the transceiver.

Receiver input filter: TD341S485H receiver integrated high performance input filter, the filter can greatly enhance the receiver's noise suppression ability to high speed differential signal. Therefore, the transmission delay of the receiver is also caused by this reason.

Bus failure protection: In general, when -200mV < A - B < -10mV, the bus receiver will be in an indeterminate state.This phenomenon occurs when the bus is idle. Bus failure protection ensures that the receiver outputs a high level when the receiver input is open, short, or when the bus access port matches the resistance. TD341S485H receiver threshold voltage is relatively accurate, and the threshold voltage to the reference ground has a margin of at least 10mV, which can ensure that even if the bus differential voltage is 0V, the receiver output level is high, and meets the requirements of EIA/TIA-485 standard ±200mV.

The bus load capacity (256 point): standard RS485 receiver input impedance is defined as 12 kΩ (unit load). A standard RS485 driver can drive at least 32 load units. TD341S485H bus receiver designed by 1/8 unit load, the input impedance is greater than 96 kΩ. As a result, the bus allows access to more transceivers (up to 256). TD341S485H can also be mixed with the standard RS485 transceiver with 32 unit loads (cumulative receiver load cannot exceed 32 units).

Low power SHUTDOWN mode: When high level is input and low power is input, the transceiver enters SHUTDOWN mode. When the transceiver enters off mode, its overall standby power consumption decreases, DE can be short-connected and controlled by the same I/O. If the high level is input and the holding time of DE low level is less than 50ns, the transceiver cannot enter the off mode. If the holding time can be maintained at least 600ns, the transceiver will reliably enter the off mode.

Drive output protection: TD341S485H internal integrated drive short circuit (or overcurrent) protection module. In case of bus error or driver short circuit, the module can limit the output current of the driver within a certain limit.

MORNSUN Guangzhou Science & Technology Co., Ltd. reserves the copyright and right of final interpretation

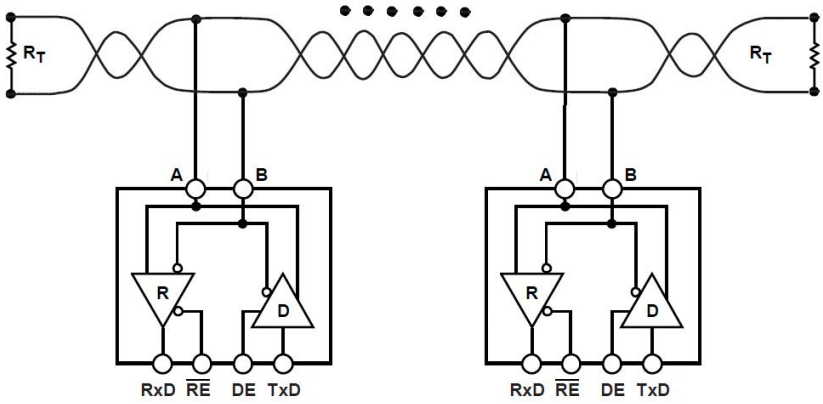


Figure 9. Typical Application Circuit (Half-Duplex Network Topology)

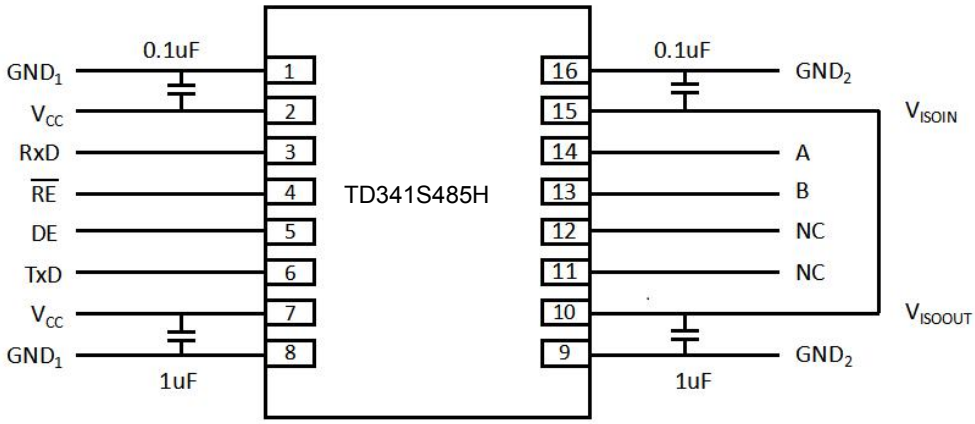


Figure 10. Typical Application of PCB layout

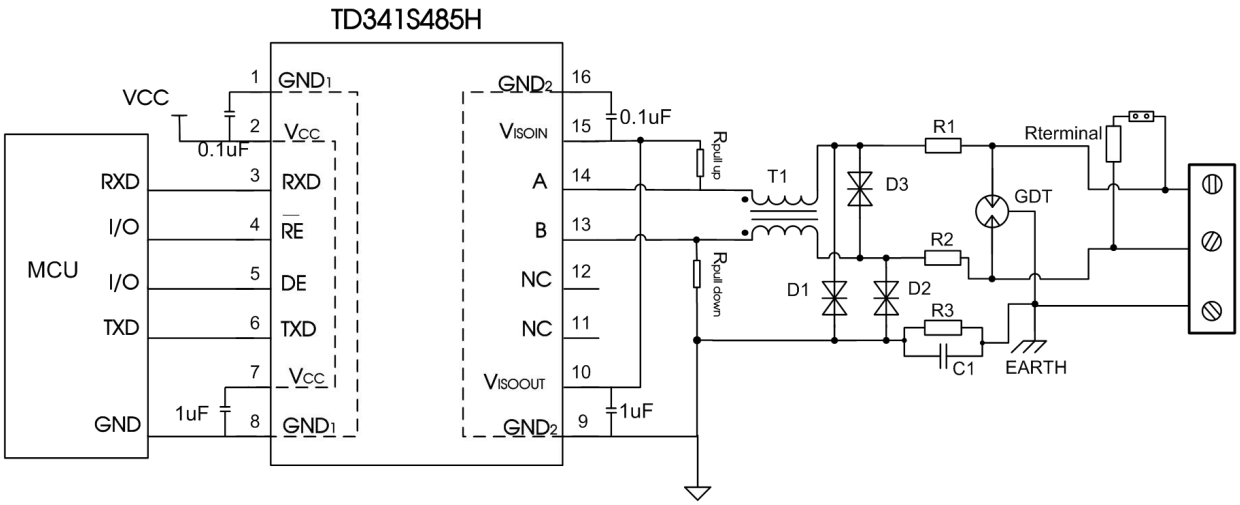


Figure 11. Port protection circuit for harsh environments

Recommended components and values:

Component	Recommended part, value	Component	Recommended part, value
R3	1MΩ	R1, R2	2.7Ω/2W
C1	1nF, 2kV	D1, D2	SMBJ6.5CA
T1	ACM2520-301-2P	D3	SMBJ6.5CA
GDT	B3D090L	$R_{terminal}$	120Ω

MORNSUN Guangzhou Science & Technology Co., Ltd. reserves the copyright and right of final interpretation

As the modules internal A / B lines come with its own ESD protection, which generally satisfy most application environments without the need for additional ESD protection devices. For harsh and noisy application environments such as motors, high voltage/current switches, lightning and similar however, we recommended that the user protects the module' s A / B lines with additional measures and external components such as TVS tube, common mode inductors, Gas discharge tube, shielded twisted pair of wires with the same single network Earth point. Figure 11 shows our recommended circuit diagram for such type of applications with components and values given in the table above. This recommendation is for reference only and may have to be adapted accordingly with appropriate component values in order to match the actual situation and application.

Note: Select the $R_{terminal}$ according to the actual application.

Using Suggests

① Power isolation V_{ISOOUT} need through a series of capacitors connected to the output pin V_{ISOIN}, in addition to the mentioned in ④ of the pull up and down function, the power supply is not recommended for other purposes, otherwise it may cause the bus voltage did not meet the requirements of communication, causes the communication failure.

② DE and $\overline{RE}$ pin do not support dangling. If the pin is not access controller, the recommended by 30 kΩ pulldown resistor pins connect to GND. Keep the node in the receiving state only, not affect the bus.

③ DE, $\overline{RE}$, TXD pin is always not allow to set to open drain output state connect the controller, otherwise it will lead to uncertain consequences.

④ To maintain A - B bus idle stability, we need at least one node will pull up A to V_{ISOIN} and drop down B to GND2 on the bus. Overall network at the same time pull up and drop down resistance of the parallel value must around 380Ω to 420Ω(0.2W).




Figure 12. Pull up and drop down resistance connect

⑤ Hot-swap is not supported.

⑥ If the external input of TXD is insufficient, the pull-up resistor should be added according to the situation.


⑦ Refer to *IPC 7093* for the welding process design of this product. For detailed operation guidance, please refer to *Hot Air Gun Welding Operation Instruction for DFN Package Product* or *Welding Operation Instruction for DFN Package Product*.


Ordering Information

Part number	Package	Number of pins	Product marking	Tape & Reel
TD341S485H	DFN	16	TD341S485H	300/REEL

MORNSUN Guangzhou Science & Technology Co., Ltd. reserves the copyright and right of final interpretation

THIRD ANGLE PROJECTION

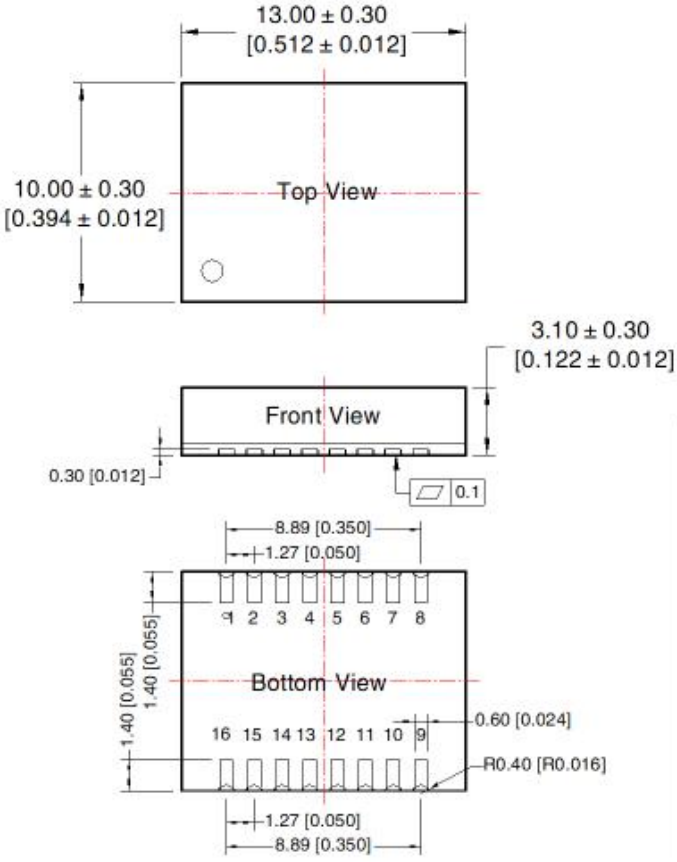

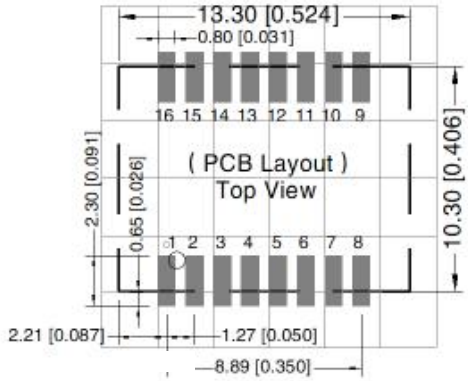


Note: Grid 2.54*2.54mm

Pin–Out			
Pin	Mark	Pin	Mark
1	GND_1	9	GND_2
2	V_{CC}	10	V_{ISOOUT}
3	RXD	11	NC
4	$\overline{RE}$	12	NC
5	DE	13	B
6	TXD	14	A
7	V_{CC}	15	V_{ISOIN}
8	GND_1	16	GND_2

Note:
Unit: mm[inch]
General tolerances: ± 0.10[± 0.004]

MORNSUN Guangzhou Science & Technology Co., Ltd. reserves the copyright and right of final interpretation

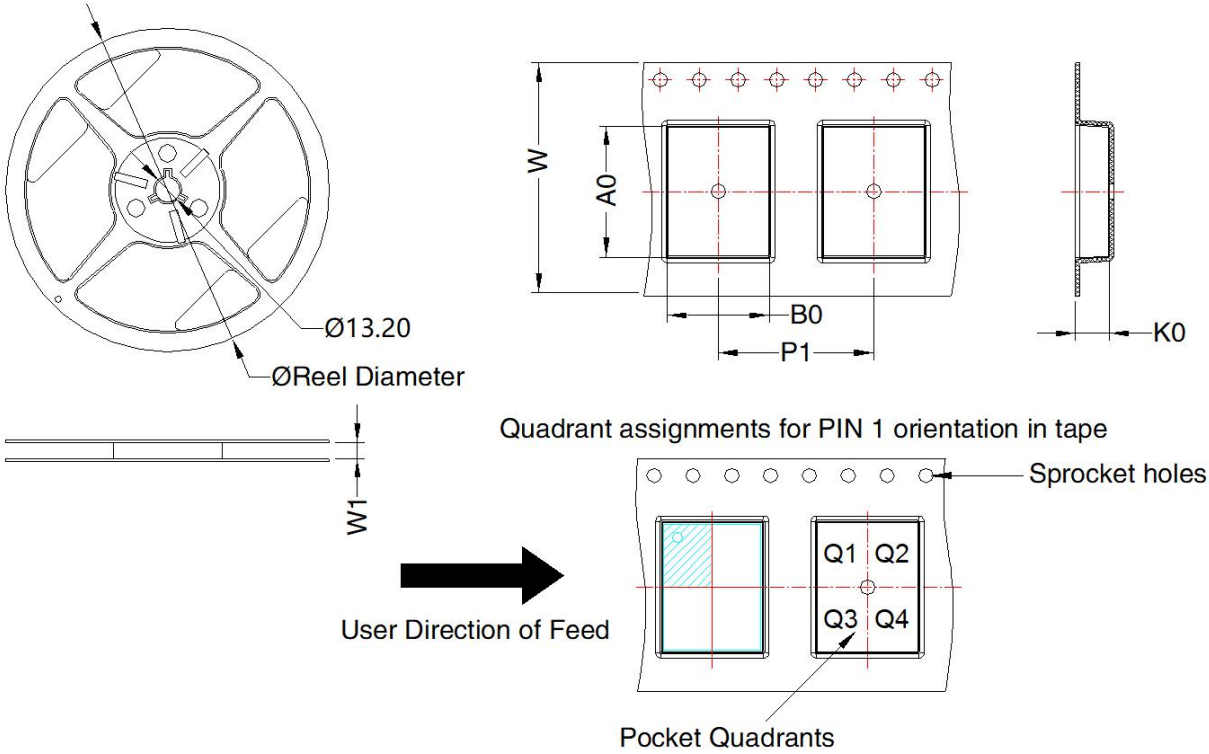

Device	Package Type	Pin	MPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
TD341S485H	DFN 10x13	16	300	180.0	24.4	13.52	10.52	3.5	16.0	24.0	Q1

MORNSUN Guangzhou Science & Technology Co., Ltd.
Address: No. 8 Nanyun 4th Road, Huangpu District, Guangzhou, China
Tel: 86-20-38601850 Fax: 86-20-38601272 E-mail: info@mornsun.cn www.mornsun-power.com

MORNSUN Guangzhou Science & Technology Co., Ltd. reserves the copyright and right of final interpretation